


- Fire fighting system with flexible pipes marked 'CE' in accordance with EN 671-2  
 Dmologazione CSI n. 0497/CFR/276  
 The system is composed of:
- 1\_ Cabinet for Internal/External use, in painted metal sheet with lock.
  - 2\_ Hose carrying saddle.
  - 3\_ Nozzle UNI 45: 'GOLD' - 'BLACK' - 'ROTTA'-'ARIZONA'
  - 4\_ Fire hose DN 45 certified EN 14540 complete with fittings UNI 804
  - 5\_ Hydrant tap DN 45 PN 16 ISD 7
  - 6\_ Safe break glass
- Sistema fisso antincendio con tubazione flessibile marcata 'CE' conforme alla norma UNI EN 671-2  
 Dmologazione CSI n. 0497/CFR/276  
 Sistema è composto:
- 1\_ Cassetto: Esterno/Interno, in lamiera verniciata.
  - 2\_ Supporto salva manichetta rosso.
  - 3\_ Lancia UNI 45: 'GOLD' - 'BLACK' - 'ROTTA'-'ARIZONA'
  - 4\_ Tubazione flessibile DN 45 a norma EN 14540 e raccordata UNI 804
  - 5\_ Rubinetto idrante DN 45 PN 16 ISD 7
  - 6\_ Lastro Safe Crash o Infrangibile

Nozzle	Factor	Nozzle	Min. flow rate	Max. working pr.
Lancia	Ligello/K	Portata	M³/h min	Pressione max
Gold	12mm/K=73.4	0.6/180	1.2 MPa	
Black	12mm/K=72	0.6/176	1.2 MPa	
Rolo	12mm/K=91.8	0.6/225	1.2 MPa	
Arizona	13mm/K=94.7	0.6/232	1.2 MPa	

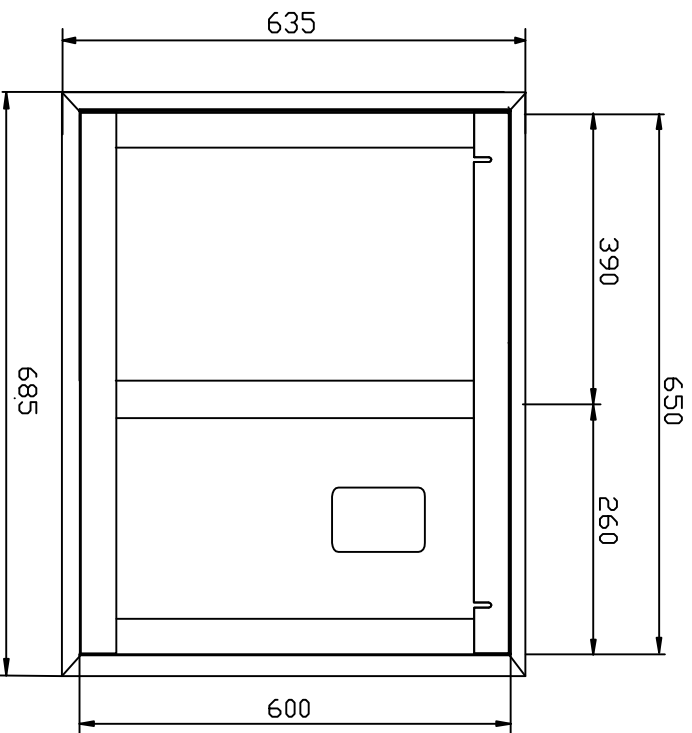

TOLLERANZE / TOLERANCES		INDICE		NATURA DELLA MODIFICA		DATA		FIRMA	
LUNGHEZZA / LENGTH	ANGOLI / ANGLES	SMUSSI / BEVELS	RAGGI / RADIUS						
UNI - ISO 27168 m				DENOMINAZIONE / DENOMINATION					
FORI / HOLES H13				ALBERI / SHAFTS H13					
SCALA / SCALE (A3+)				MATERIALE / MATERIAL					
DUREZZA / HARDNESS				PESO / WEIGHT				VERIFICATO/CONTROLLED DATA	
RESISTENZA / STRENGTH				TRATTAMENTO/TREATMENT				CODICE / CODE	
VERIFICATO/CONTROLLED DATA				DESIGNATO/ DRAWING DATA				FIRMA	

**IDRANTE DA INCASSO CON ESTINTORE COMBINATO**

**ZIGGIOTTO & C.**  
 RONCO ALL'ADIGE  
 VERONA - ITALIA

VERNICATURA - RAL3000 sch-ART41/e REV.1