




# Sfiato automatico a doppio galleggiante

## Double action air relief valve

# ZIGGIOTTO

### Articolo 116

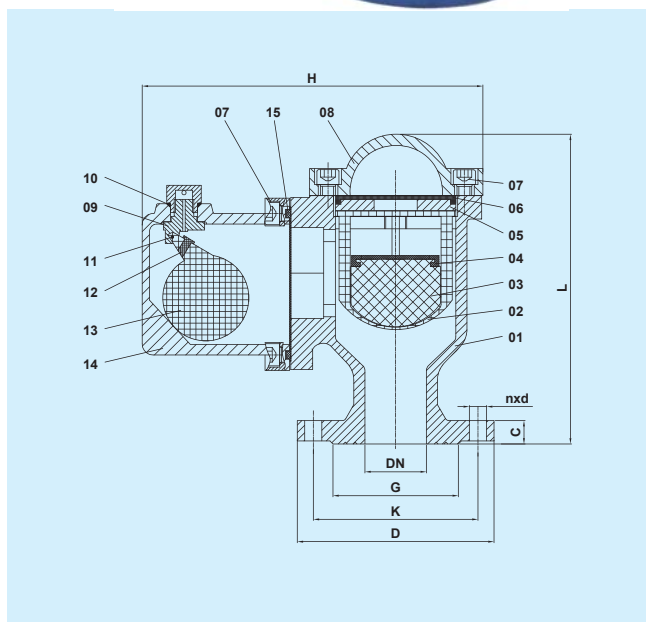

#### Briefs

- Flange end, Air Release Valve DN50-150;
- Working pressure PN10/ PN16;
- Suitable temperature +5 C - +45 C ;
- Suitable for portable water;
- CE approved.

#### Standards

- Design: EN1074-4;
- Flange: EN 1092-2;
- Test: EN1266-1;
- Coating: EN 30677.

#### Features

- Inside & outside fusion bonded epoxy coating;
- double chamber design.

#### Options

- Various coating;
- PN25.

#### Assembly Chart

ITEM	DESCRIPTION	MATERIAL	STANDARD
1	BODY	EN GJS 500-7	EN1563
2	NET	PLASTIC	COMMERCIAL
3	FLOAT	PLASTIC	COMMERCIAL
4	GASKET	EPDM	EN 681
5	BRASS COVER	BRASS	EN1982
6	GASKET	EPDM	EN681
7	BOLT	GD8.8	COMMERCIAL
8	BONNET	EN GJS 500-7	EN1563

ITEM	DESCRIPTION	MATERIAL	STANDARD
9	VALVE OUTLET	BRASS	EN1982
10	O-RING	NBR	EN 681
11	PIN	SS304	ASTM A276
12	GASKET	EPDM	EN681
13	FLOAT	PLASTIC	COMMERCIAL
14	DEGRASSING BODY	EN GJS 500-7	EN1563
15	GASKET	EPDM	EN681

#### Specifications & Parameters Chart

DN	D	PN10			PN16			L	H
		K	C	n-d	K	C	n-d		
50	165	125	19	4-20	125	19	4-20	255	285
65	185	145	19	4-20	145	19	4-20	255	285
80	200	160	19	4-20	160	19	8-20	255	285
100	220	180	19	8-20	180	19	8-20	325	330
150	285	240	19	8-24	240	19	8-24	325	330