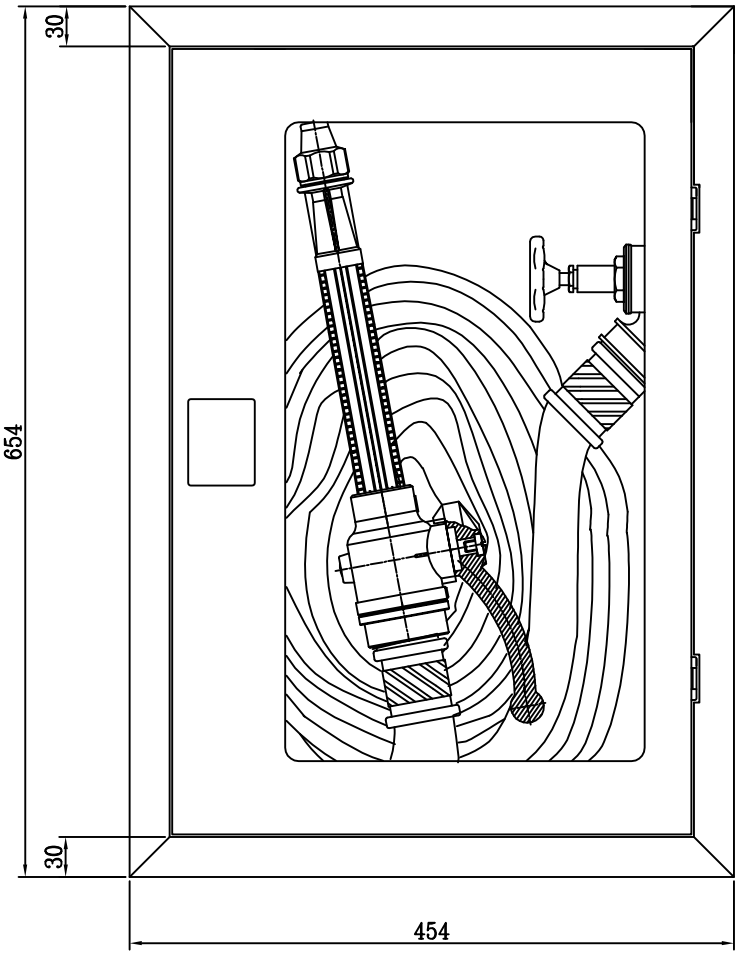

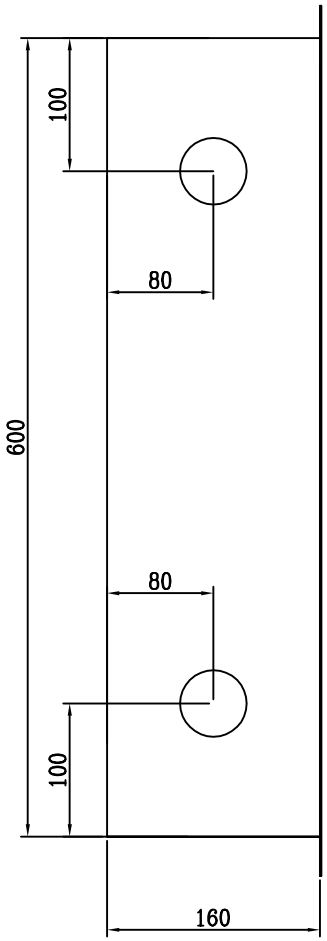

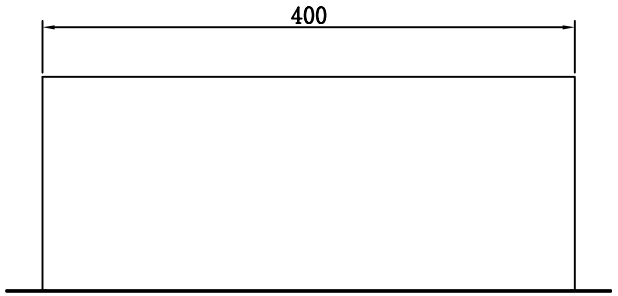

Fire fighting system with flexible hose "CE" marked in compliance with EN 671-2
CSI approval n. 0497/CPR/276

Complete with:

1_ recessed Cabinet available both in red painted metal sheet

2_ Plastic hose support.

3_ UNI 45 branchpipe: "GOLD" - "BLACK" - "ROTO" - "ARIZONA"

4_ DN45 Fire hose in compliance with EN 14540 complete with UNI 804 brass couplings

5_ Hydrant valve DN 45 PN 16 ISO 7

6_ Unbreakable or safe glass, or full door

Sistema fisso antincendio con tubazione flessibile marcata "CE" conforme alla norma UNI EN 671-2
Omologazione CSI n. 0497/CPR/276

Sistema è composto:

1_ Cassetta: da incasso in lamiera verniciata

2_ Supporto salva manichetta rosso.

3_ Lancia UNI 45: "GOLD" - "BLACK" - "ROTO"- "ARIZONA"

4_ Tubazione flessibile DN 45 a norma EN 14540 e raccordata UNI 804

5_ Rubinetto idrante DN 45 PN 16 ISO 7

6_ Lastra Safe glass o Infrangibile o a portello chiuso

Nozzle	*Factor Nozzle*	*Min. flow rate*	*Max working pr.*
Lancia	*Ugello/K*	*Portata Mp/l min*	*Pressione max*
Gold	12mm/K=73.4	0.6/180	1.2 MPa
Black	12mm/K=72	0.6/176	1.2 MPa
Roto	12mm/K=91.8	0.6/225	1.2 MPa
Silver	13mm/K=101.22	0.6/248	1.2 MPa
Arizona	13mm/K=94.7	0.6/232	1.2 MPa

TOLLERANZE / TOLERANCES							
LUNGHEZZA	ANGOLI	SMUSSI	RAGGI				
LENGTH	ANGLES	BEVELS	RADIUS	INDICE	NATURA DELLA MODIFICA	DATA	FIRMA
FORI/ HOLES		ALBERI/ SHAFTS		DENOMINAZIONE / DENOMINATION: SIST. "CE" CUBA DN 45 EN 671-2 - INCASSO VERNICIATO			
E		SCALA / SCALE		MATERIALE / MATERIAL		DISEGNATO/ DRAWN: S BR	DATA: 14/10/2013
ZIGGIOTTO & C. RONCO ALL'ADIGE VERONA - ITALIA				DUREZZA / HARDNESS	PESO / WEIGHT: Kg	VERIFICATO/CONTROLLED	DATA
				RESISTENZA / STRENGTH	TRATTAMENTO/TREATMENT	CODICE / CODE: sch-ART39/m REV.2	

A termini di legge è vietato l'uso, la divulgazione e la riproduzione senza l'autorizzazione scritta della ZIGGIOTTO & C.