

Art. S81 SPRINKLER UPRIGHT “STANDARD RESPONSE”

Sprinkler upright standard response

Caratteristiche / Specifications

- Per tutte le classi di pericolo / All Hazards
- Bulbo da 5 mm / 5 mm bulb

Aree di utilizzo / Usage areas

- Casa / House
- Hotel / Hotel
- Ospedale / Ospedale
- Parcheggio / Autopark
- Centro commerciale / Mall
- Dormitorio / Dormitory
- Sala convegni / Trade Center




Ref.
2831

Cert/LPCB
Ref. 1402a

Montaggio in ambienti senza contro-soffitto con il deflettore rivolto verso l'alto. L'acqua colpisce i deflettori e spruzza verso il basso con espansione conica. Può essere utilizzato per sistemi a umido, a secco e a reazione.

Mounted in locations without suspended ceilings with the deflector pointing upwards. The water hits the deflector and sprays downwards with a conical expansion. It can be used for wet, dry and pre-action systems.

Articolo catalogo /Catalogue Code	S81 - 1/2"	S/81 - 3/4"
Fattore K/K Factor	K5.6(80),	K8.0(115)
Dimensione del filetto/Thread size	1/2" NPT (15 mm)	3/4" NPT (20 mm)
Risposta/Response	Risposta Standard / Standard Response	
Finitura/Finishes	Ottone, Cromo / Brass, Chrome	
Temperatura/Temperature	57°C (135°F), 68°C (155°F), 79°C (175°F), 93°C (200°F), 141°C (286°F), 182°C (360°F)	

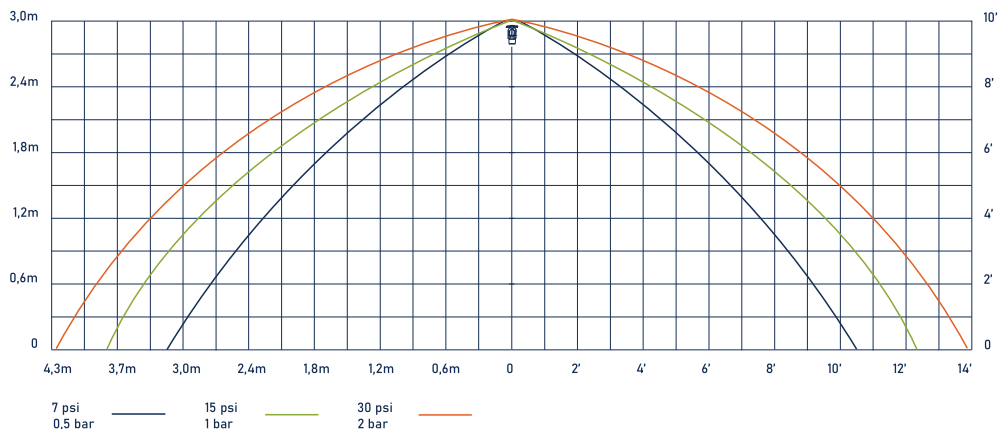

Rev,0 del 04.03.24