

# Art. S83 SPRINKLER UPRIGHT “QUICK RESPONSE”

## Sprinkler upright quick response

### Caratteristiche / Specifications

- Per tutte le classi di pericolo / All Hazards
- Bulbo da 3 mm / 3 mm bulb

### Aree di utilizzo / Usage areas

- Casa / House
- Centro commerciale / Mall
- Hotel / Hotel
- Dormitorio / Dormitory
- Ospedale / Ospedale
- Sala convegni / Trade Center
- Parcheggio / Autopark




Ref. 2831

Cert/LPCB Ref. 1402a

Montaggio in ambienti senza contro-soffitto con il deflettore rivolto verso l'alto. L'acqua colpisce il deflettore e spruzza verso il basso con espansione conica. Può essere utilizzato per sistemi a umido, a secco e a preazione.

Mounted in locations without suspended ceilings with the deflector pointing upwards. The water hits the deflector and sprays downwards with a conical expansion. It can be used for wet, dry and pre-action systems.

|                                    |  |                  |
|------------------------------------|--|------------------|
| Articolo catalogo /Catalogue Code  | S83 - 1/2"   | S/83 - 3/4"      |
| Fattore K/K Factor                 | K5.6(80),  | K8.0(115)        |
| Dimensione del filetto/Thread size | 1/2" NPT (15 mm)   | 3/4" NPT (20 mm) |
| Risposta/Response                  | Risposta Rapida / Quick Response   |                  |
| Finitura/Finishes                  | Ottone,Cromo / Brass,Chrome  |                  |
| Temperatura/Temperature            | 57°C(135°F), 68°C(155°F), 79°C(175°F), 93°C(200°F), 141°C(286°F), 182°C(360°F) |                  |

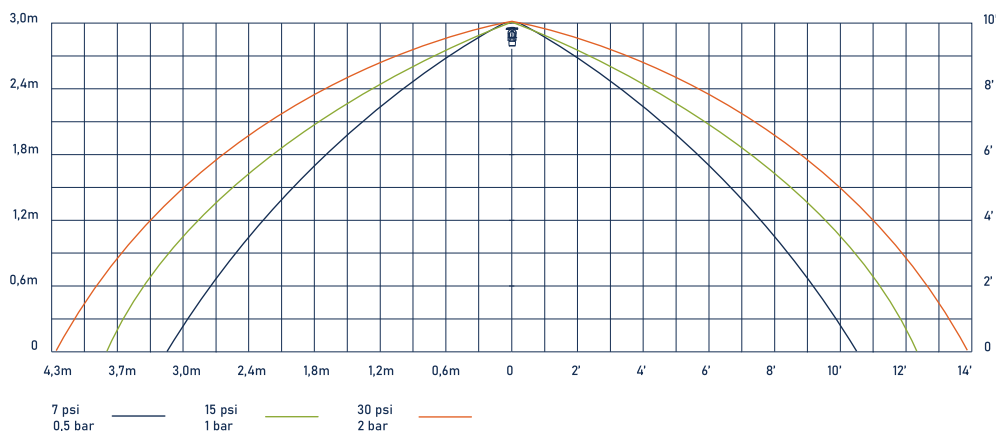

Rev,0 del 06.03.24