


Gate valve with open/close indicator lockable while open . it comply with UNI 10779 and UNI 11443 standards.

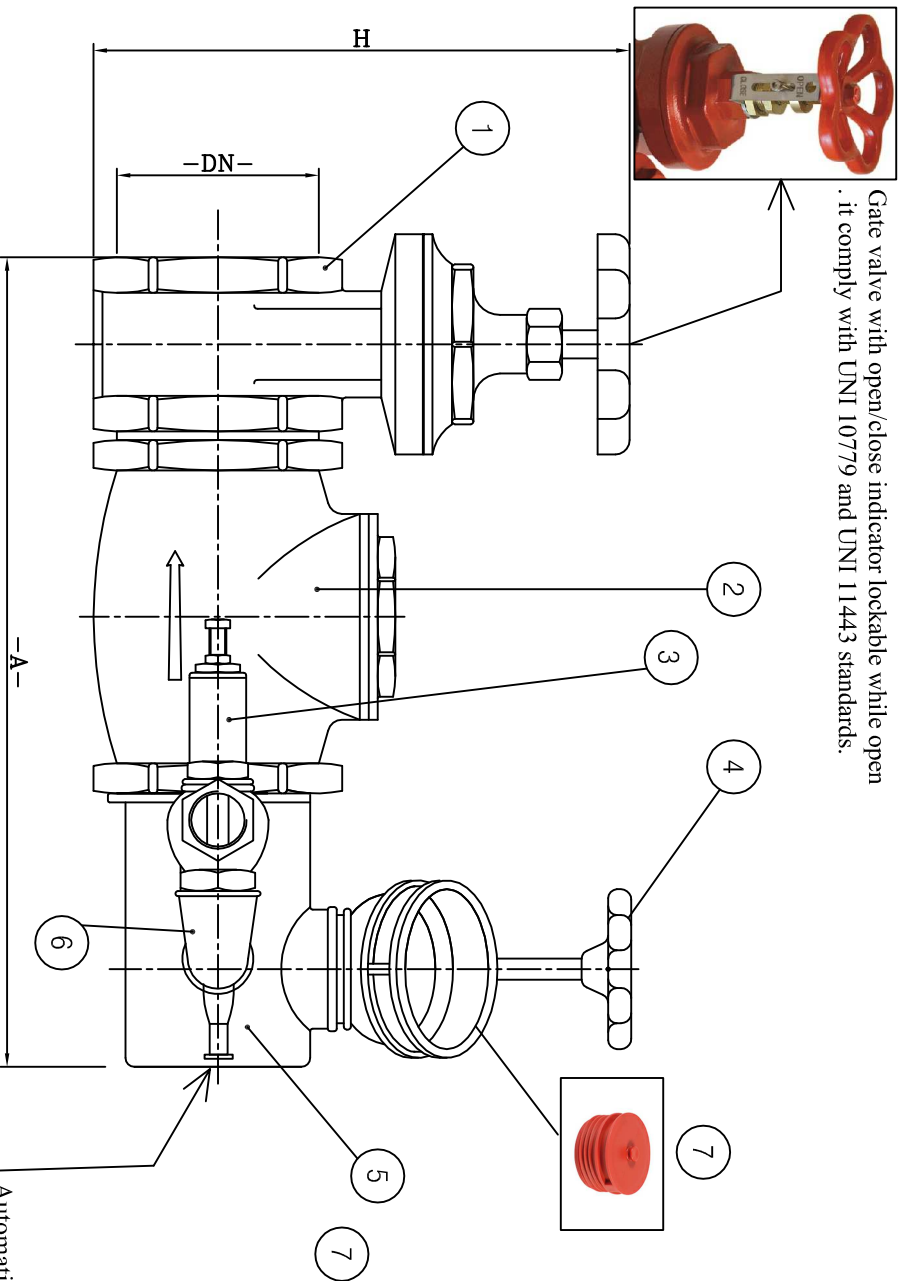

PAINTING: EPOXY RED RAL 3000

- FEATURES:**
- FIRE BRIGADE CONNECTION : UNI 70 WITH SPINDLE
  - CONNECTION TO MAIN PIPE : FLANGE pn16/ BSP THREAD

N.B= WE CAN PUT BRASS CAP

**Attention:**  
If connection diameter is bigger than 4", gate valve will be supplied in ductile iron and main body in carbon steel.

Automatic drain system

thread	DN	connect.	-A- mm	-H- mm	-P- mm
A1250	2"	1x70	270	260	175
A1250D	2"	2x70	270	260	175
A1251	2 1/2"	1x70	280	270	180
A1252	2 1/2"	2x70	420	270	180
A1253	3"	1x70	340	280	190
A1254	3"	2x70	470	280	190
A1255	4"	1x70	387	330	210
A1256	4"	2x70	515	330	210
A1257	4"	3x70	650	330	210

07	5A055AP	PLASTIC CAP UNI 70	POLYPROPYLENE	1/2
06	4R04XX	90° ELBOW	GALVANIZED CARBON STEEL	1
05	1G000XX	MAIN BODY	CAST IRON GJS200	1
04	4R0005	VALVE UNI 70 X 2" WITH SPINDLE	BRASS 58 - EN 1982	1
03	4R03XX	SAFETY VALVE	BRASS 58 - EN 1982	1
02	4R02XX	CHECK VALVE	BRASS 58 - EN 1982	1
01	4R01XX	GATE VALVE	BRASS 58 - EN 1982	1
<b>Pos. Codice</b>	<b>Descrizione</b>	<b>Material</b>	<b>Q.tà</b>	

TOLLERANZE / TOLERANCES		NATURA DELLA MODIFICA		DATA	FIRMA
LUNGHEZZA / LENGTH	ANGOLI / ANGLES	SMI/SSI / RADIUS			
UNI - ISO 27168	m				
<b>FORI / HOLES</b>	<b>ALBERI / SHAFTS</b>	<b>DENOMINAZIONE / DENOMINATION</b>			
H13	H13	<b>THREADED FIRE BRIGADE CONNECTION UNI 10779</b>			
SCALA / SCALE	SCALA / SCALE	<b>MATERIALE / MATERIAL</b>			
		BRASS - CAST IRON			
<b>DUREZZA / HARDNESS</b>	<b>PESO / WEIGHT</b>	<b>DISSEGNO / DRAWING DATA</b>	04/12/2019	<b>FIRMA</b>	
		<b>RESISTENZA / STRENGTH</b>			
		<b>TRATTAMENTO/TREATMENT</b>			
		<b>VERNICIATURA</b>			

**ZIGGIOTTO & C.**  
RONCO ALL'ADIGE  
VERONA - ITALIA

RESISTENZA / STRENGTH

TRATTAMENTO/TREATMENT

VERNICIATURA

sch - Art38 Rev.1

A termini di legge è veduto l'uso, la delegazione e la riproduzione senza l'autorizzazione scritta della ZIGGIOTTO & C.