



WAFER BUTTERFLY VALVE

ZIGGIOTTO

ART S.95

VALVOLA A FARFALLA WAFER PN10/16



WAFER BUTTERFLY VALVE PN10/16

APPLICAZIONE:

Impianti idrici, riscaldamento, condizionamento e antincendio.

APPLICATION:

Water systems, heating, conditioning and fire prevention.

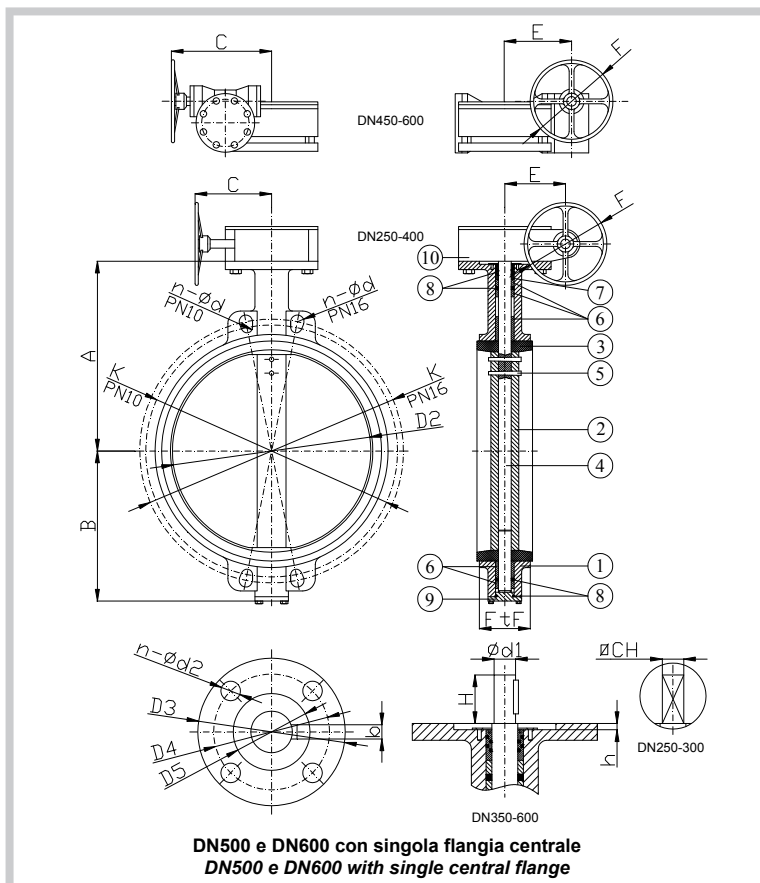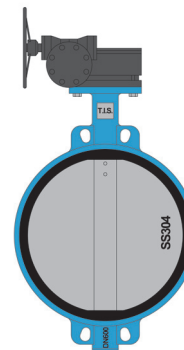

NORMA PROGETTO: EN 593, EN 1074-1 ed EN 1074-2
SCARTAMENTO: EN 558 Serie 20
FLANGE: EN 1092-2
COLLAUDI: EN 12266-1
FLANGIA SUPERIORE: ISO 5211
TEMP. ESERCIZIO: EPDM ≤ +120°C NBR ≤ +80°C
DESIGN STANDARD: EN 593, EN 1074-1 and EN 1074-2
FACE TO FACE: EN 558 Series 20
FLANGES: EN 1092-2
TESTS: EN 12266-1
TOP FLANGE: ISO 5211
WORKING TEMP.: EPDM ≤ +120°C NBR ≤ +80°C

DENOMINAZIONE PART

MATERIALI MATERIALS

	Art. D104	Art. D106
1 CORPO BODY	EN-GJL 250 EN-GJL 250	EN-GJS 400-15 EN-GJS 400-15
2 DISCO DISC	EN-GJS 400-15 EN-GJS 400-15	INOX AISI 304 SS AISI 304
3 TENUTA SEAT	NBR o EPDM NBR or EPDM	
4 ALBERO STEM	ACC. INOX AISI 420 (EN 1.4021) SS AISI 420 (EN 1.4021)	
5 PIN PIN	ACC. INOX AISI 420 (EN 1.4021) SS AISI 420 (EN 1.4021)	
6 BOCCOLA BUSHING	FIBRA DI VETRO + PTFE FIBERGLASS + PTFE	
7 BOCCOLA DI TENUTA SEAL BUSH	BRONZO/ALLUMINIO ALUMINUM/BRONZE	
8 O-RING O-RING	NBR NBR	
9 COPERCHIO COVER	EN-GJL 250 EN-GJL 250	EN-GJS 400-15 EN-GJS 400-15
10 RIDUTTORE GEAR BOX	EN-GJL 250 EN-GJL 250	

RIVESTIMENTO ESTERNO/INTERNO: Polvere epossidica di colore blu RAL 5015 con spessore 250µm.

SURFACE PROTECTION: FBE coating process with epoxy resin powder of blue colour RAL 5015 and thickness of 250µm.

DN	K		n-ød		D2	D3	D4	D5	n-ød2	h	CH	ød1	b	H	A	B	C	E	F	FtF	Kv	W (kg)
	PN10	PN16	PN10	PN16																		
250	350	355	12-23	12-28	250	125	102	70	4-12	4	22	-	-	40	292	203	222	100	315	68	3948	26
300	400	410	12-23	12-28	301	140	102	70	4-12	4	22	-	-	45	337	242	213	120	315	78	6567	38
350	460	470	16-23	16-28	333	150	125	85	4-14	4	-	28	8	52	368	267	213	120	315	78	9252	50
400	515	525	16-28	16-31	389	197	140	100	4-18	5	-	36	10	52	400	309	251	160	315	102	13382	82
450	565	585	20-28	20-31	440	197	140	100	4-18	5	-	42	10	52	422	328	251	160	315	114	16825	100
500	620	650	20-28	20-34	491	197	140	100	4-18	5	-	42	10	65	480	361	278	160	315	127	21720	144
600	725	770	20-31	20-37	592	276	165	130	4-22	5	-	50	16	70	562	459	304	180	315	154	32493	249