


## Art. 502 RACCORDO STORZ PER TUBAZIONI FLESSIBILI

**Raccordo Storz in lega leggera per manichette.**

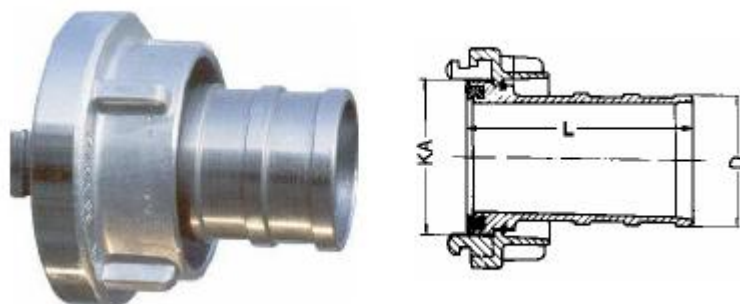

*Guarnizione inclusa.*

*Tenuta: gomma nitrile nera/bianca.*

*Fluoro gomma- acciaio inox*

| TAGLIA STORZ | KA (mm) | D (mm)<br>DIAMETRO | L (mm)<br>LUNGHEZZA | PESO (kg) | CODICE | NORMA     |
|--------------|---------|--------------------|---------------------|-----------|--------|-----------|
| 25-D         | 31      | 25                 | 53                  | 0,09      | ATS101 | DIN 14301 |
| 32           | 44      | 32                 | 70                  | 0,14      | ATS102 | -         |
| 38           | 51      | 38                 | 90                  | 0,22      | ATS103 | -         |
| 52-C         | 66      | 45                 | 90                  | 0,37      | ATS104 | -         |
| 52-C         | 66      | 52                 | 90                  | 0,37      | ATS105 | DIN 14321 |
| 65           | 81      | 65                 | 95                  | 0,51      | ATS106 | -         |
| 75-B         | 89      | 70                 | 125                 | 0,73      | ATS107 | -         |
| 75-B         | 89      | 75                 | 125                 | 0,71      | ATS108 | DIN 14322 |
| 100          | 115     | 100                | 150                 | 1,15      | ATS109 | -         |
| 110-A        | 133     | 110                | 170                 | 1,66      | ATS110 | -         |

Rev,0 del 16.01.2023