

Art. S83 SPRINKLER UPRIGHT “QUICK RESPONSE”

Sprinkler upright quick response

Caratteristiche / Specifications

- Per tutte le classi di pericolo / [All Hazards](#)
- Bulbo da 3 mm / [3 mm bulb](#)

Aree di utilizzo / Usage areas

- Casa / [House](#)
- Centro commerciale / [Mall](#)
- Hotel / [Hotel](#)
- Dormitorio / [Dormitory](#)
- Ospedale / [Ospedale](#)
- Sala convegni / [Trade Center](#)
- Parcheggio / [Autopark](#)




Ref.
2831

Cert/LPCB
Ref. 1402a

Montaggio in ambienti senza contro-soffitto con il deflettore rivolto verso l'alto. L'acqua colpisce il deflettore e spruzza verso il basso con espansione conica. Può essere utilizzato per sistemi a umido, a secco e a preazione.

Mounted in locations without suspended ceilings with the deflector pointing upwards. The water hits the deflector and sprays downwards with a conical expansion. It can be used for wet, dry and pre-action systems.

Articolo catalogo /Catalogue Code	S83 - 1/2"	S/83 - 3/4"
Fattore K/K Factor	K5.6(80),	K8.0(115)
Dimensione del filetto/Thread size	1/2" NPT (15 mm)	3/4" NPT (20 mm)
Risposta/Response	Risposta Rapida / Quick Response	
Finitura/Finishes	Ottone,Cromo / Brass,Chrome	
Temperatura/Temperature	57°C(135°F), 68°C(155°F), 79°C(175°F), 93°C(200°F), 141°C(286°F), 182°C(360°F)	

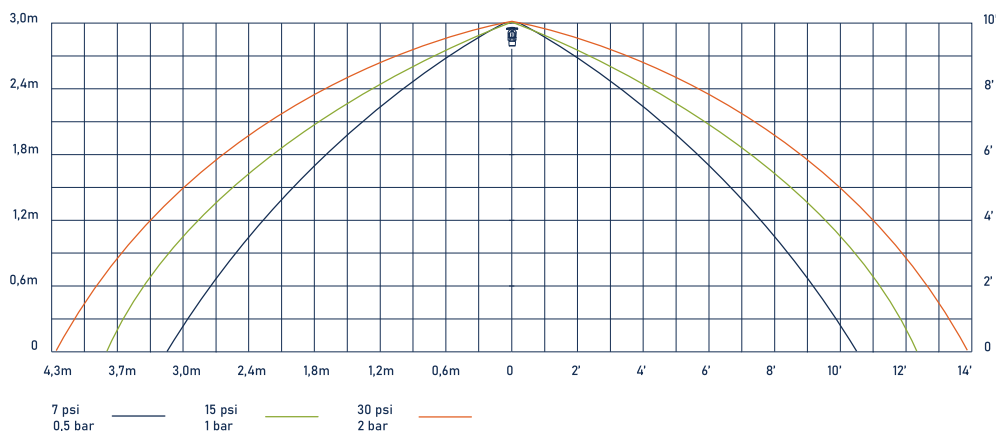

Rev,0 del 06.03.24